


CXO300

Technical Specification

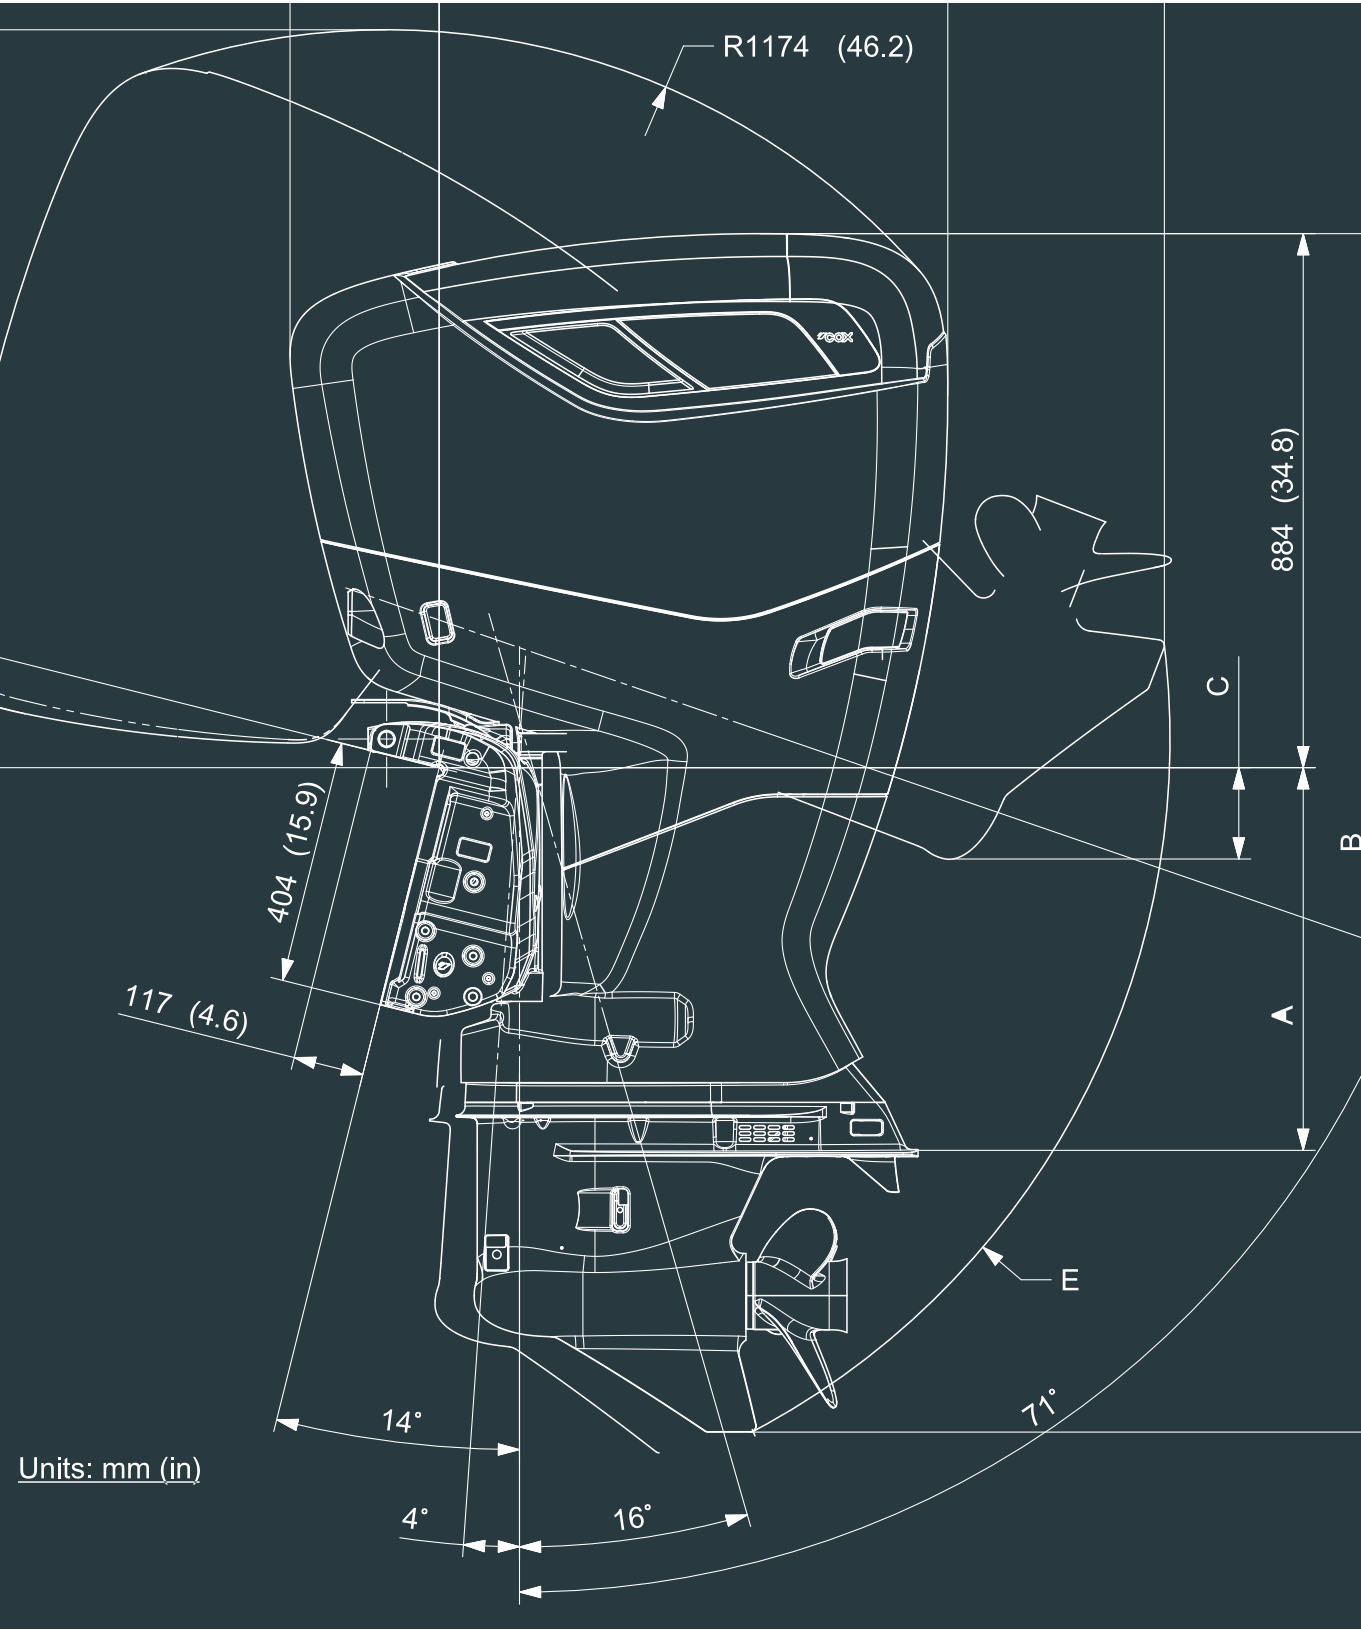

COX	TYPE	CXO300	DIESEL OUTBOARD ENGINE
	YEAR	2018	

CXO300
Technical data

Engine designation	CXO300
Crankshaft power, kW (hp)	252 (338)
Propeller shaft power, kW (hp)	224 (300)
Engine propping speed, rpm	3700-4000
Displacement, L (cu.in.)	4.4 (266)
Number of cylinders	8
Bore/stroke, mm (in.)	84 (3.3) / 98.5 (3.9)
Compression ratio	16
Weight, kg (lb)	375 (826)
Ratio 1 (Propeller speed)	1.23:1 (3259)
Ratio 2 (Propeller speed)	1.46:1 (2739)
Peak torque, Nm (ft.lb)	650 (479)
Aspiration	Twin-turbo
Shaft Length, inch(mm)	25"(635)/30"(762)/35"(889)
Emission compliance	EPA 3, IMO 2, RCD 2
Start assist	Glow plugs
Rating	Light-duty commercial
Trim range	-4° to +16°
Tilt range	71°
Engine Oil Spec	API CI-4 / SAE 5W40
Gear Oil Spec	API GL-5 / SAE 75W140
Propeller spline spec	1.25" shaft / 19 tooth
Colour options	Black / White

CXO300
Technical description**Engine block and head**

- Aluminium alloy block and heads
- 60 degree V8

Engine mounting

- Standard outboard fitting layout
- 6-bolt mounting with multi-hole adjustment

Fuel system

- High pressure common rail fuel injection
- On-engine fuel filtration

Air inlet and exhaust system

- Exhaust gas recirculation system
- Twin turbochargers
- Air filters with replaceable inserts
- Closed crankcase ventilation

Transmission

- All outboards offer standard and counter rotating capability, programmable through the ECU

Cooling system

- Thermostatically regulated raw water cooling
- Tubular heat exchanger

Electric system


- 12V/24V two-pole electrical system
- 80A marine alternator

CXO300
Instruments & controls**Instruments/control**


- Electronic controls
- Joystick to manage up to 6 engines
- Keyless key fob
- Wireless MOB and Key
- NMEA 2000 CAN displays and controls
- 4.8"/7"/10"/12" screen sizes
- Compatible with the off the shelf Seastar and Ultraflex steering units, and 19t 1.25 propeller hub kits

CXO300


Power at Propshaft (hp)

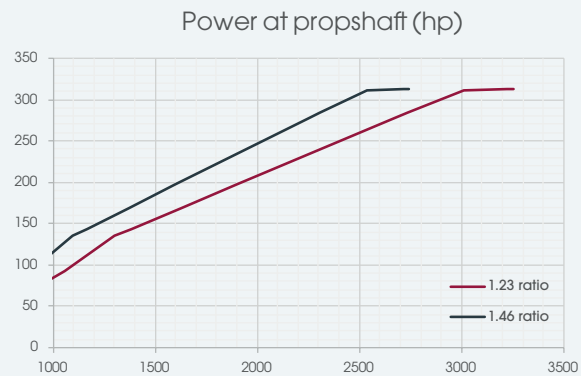
CXO300


Torque at Crankshaft
Nm (lb.ft)

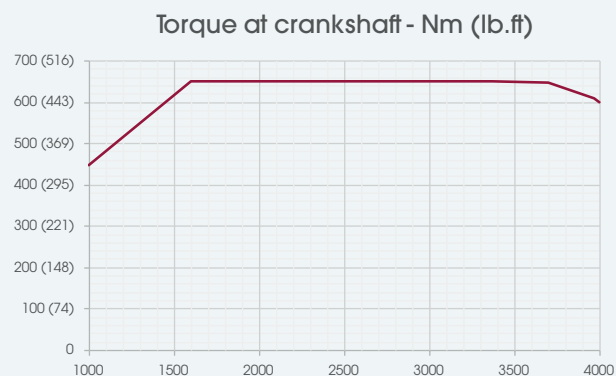
CXO300

Torque at Propshaft
Nm (lb.ft)

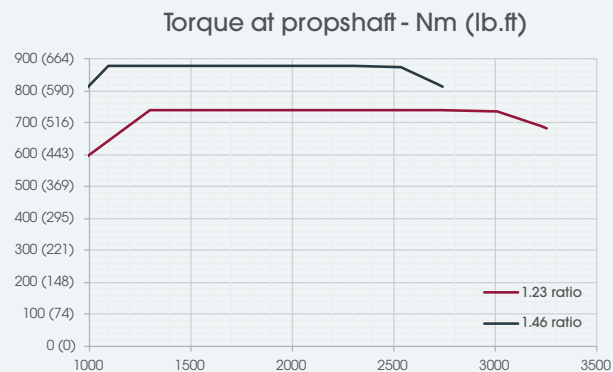
CXO300

ISO E3/E5 fuel
consumption (L/h)
Fuel curve under
ISO 8178 E3/E5 conditions

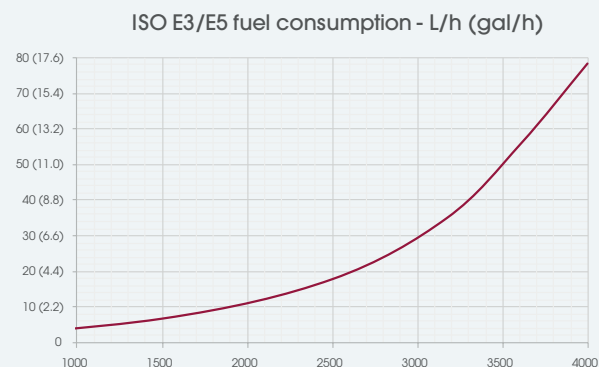

CXO300

Technical drawing

25" Leg Length

Dimensions - mm (in)

A	634 (25)
B	1984 (78.1)
C	151 (5.9)
D	1201 (47.3)
E	1297 (51)

30" Leg Length


Dimensions - mm (in)

A	761 (30)
B	2111 (83.1)
C	177 (7)
D	1326 (52.2)
E	1424 (56)

35" Leg Length

Dimensions - mm (in)


A	888 (35)
B	2238 (88.1)
C	204 (8)
D	1450 (57.1)
E	1551 (61)

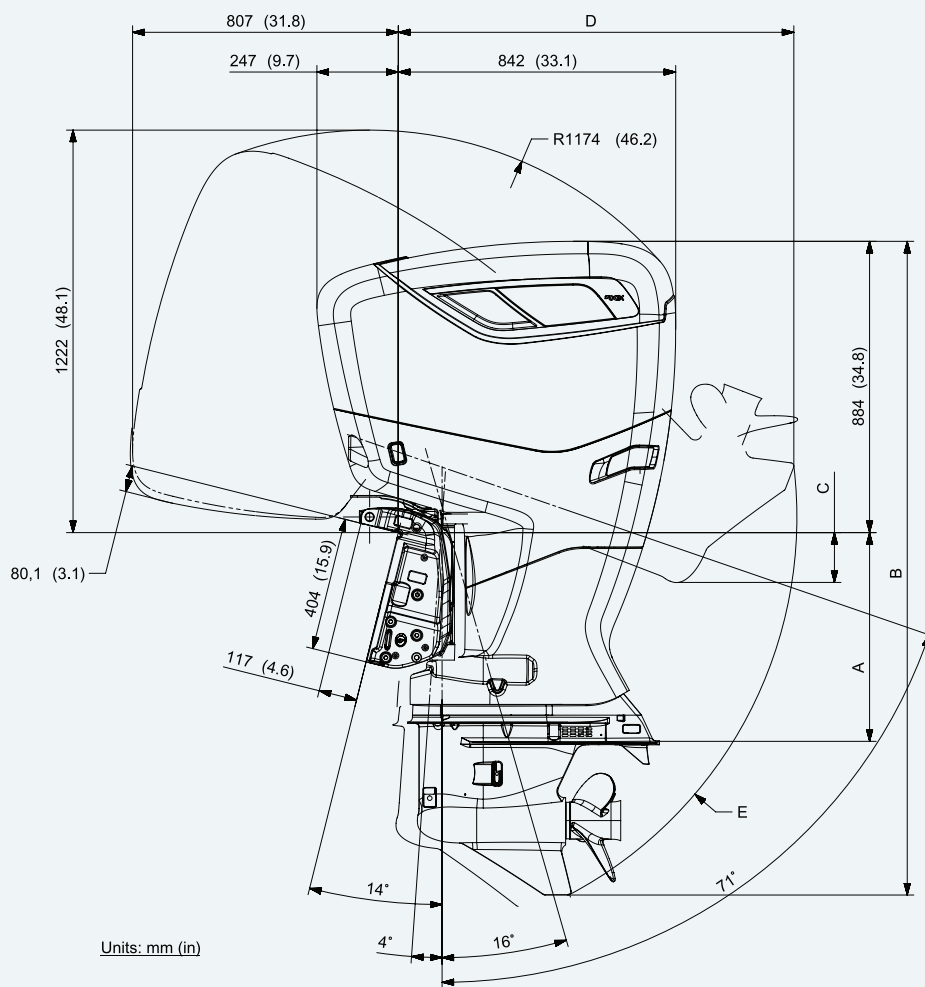


CXO300

Plan view /
Transom Interface

Dimensions - mm (in)

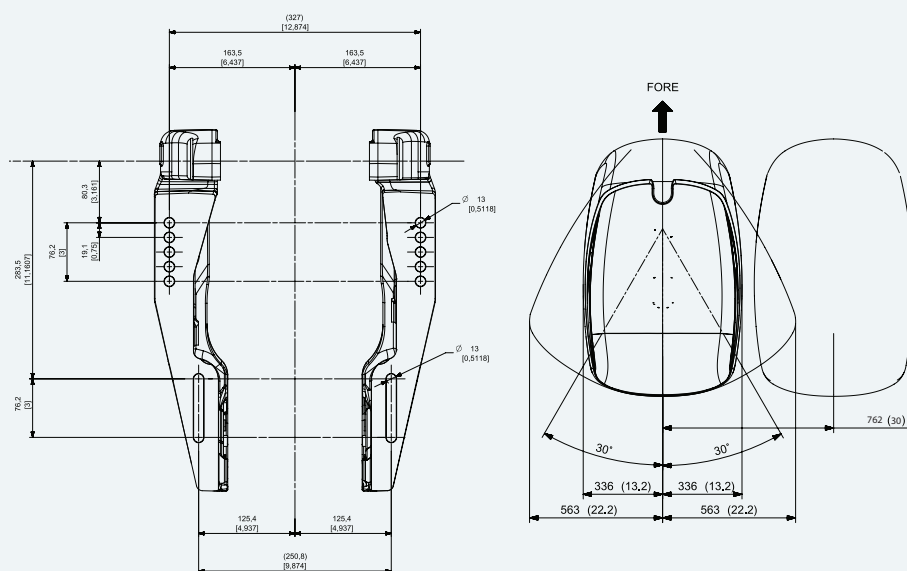

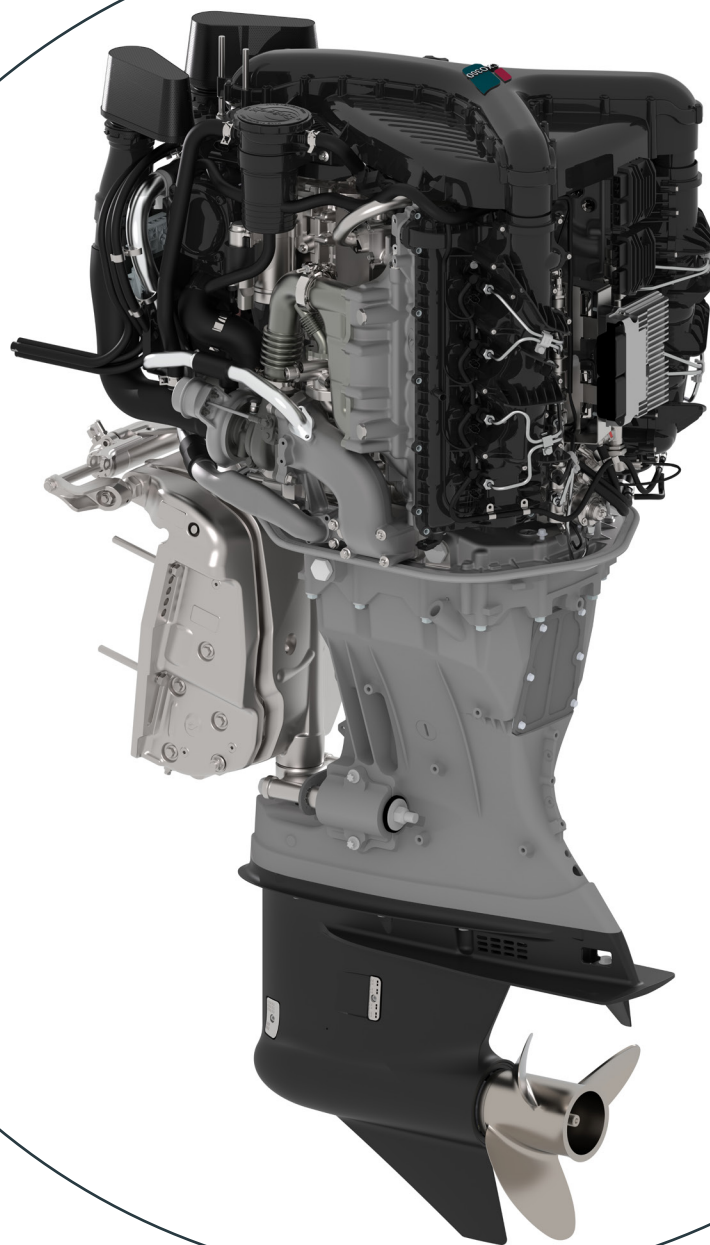



● Black finish

300HP diesel outboard



○ White finish

More information

Please contact your nearest Cox Powertrain distributor for more details about Cox diesel outboard engines.

Cox Powertrain Limited

8 Cecil Pashley Way
Shoreham (Brighton City) Airport
Lancing BN43 5FF
United Kingdom

+44 1273 454 424
info@coxpowertrain.com
www.coxmarine.com
CoxPowertrain

