


OUTLET CHECK KIT #HP0962

Capilano 250V and 275V Helm Pumps

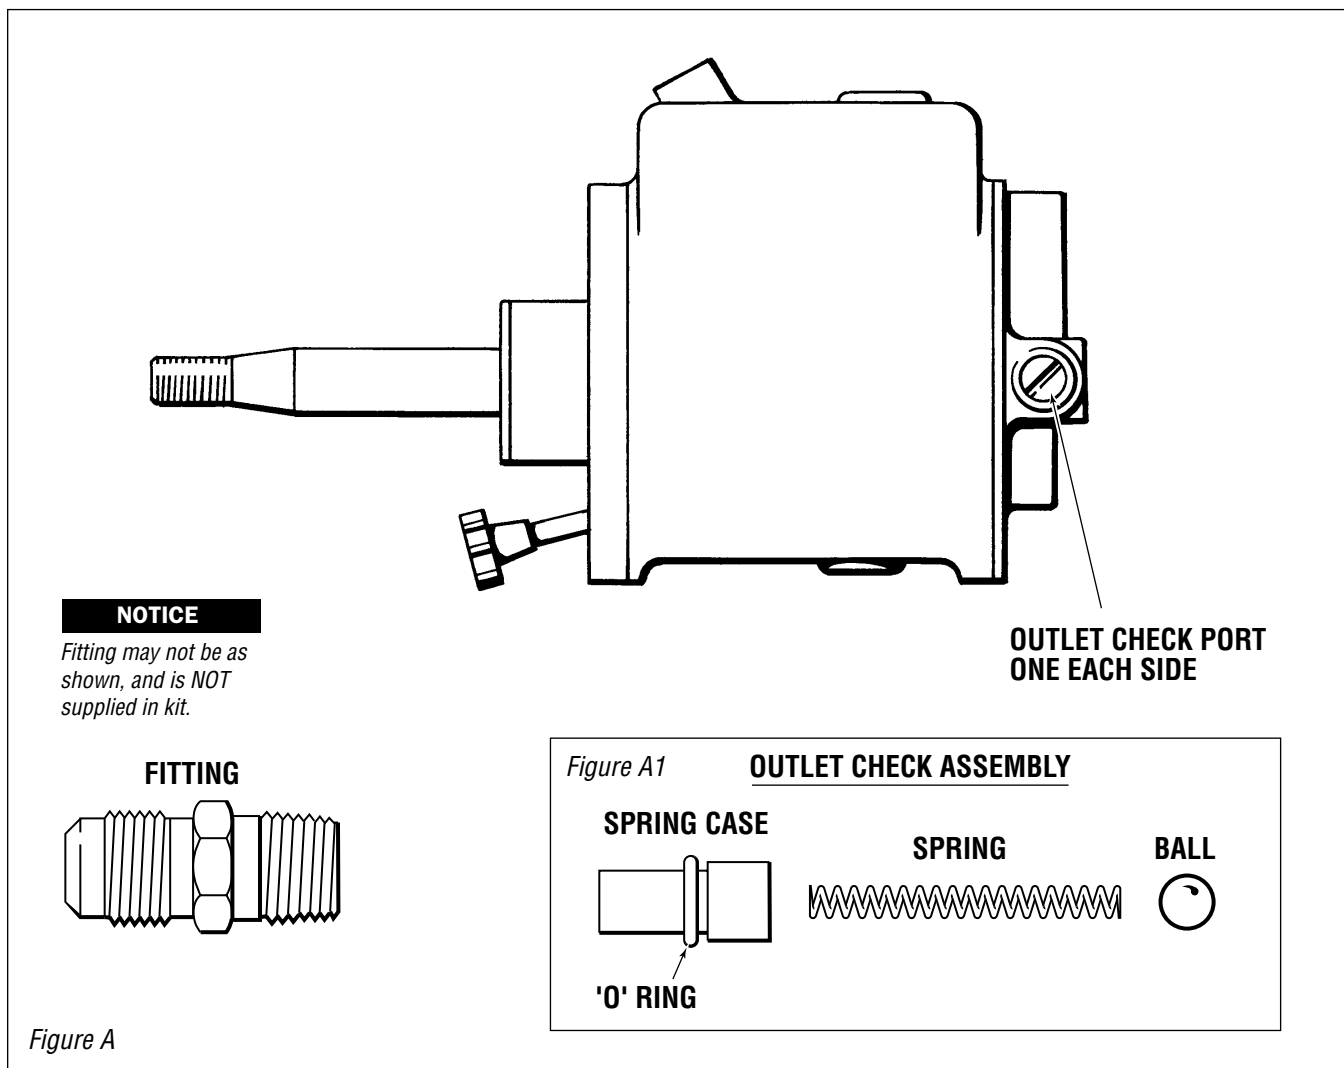

1. Remove the fitting from the Outlet Check Port.
2. Remove the Outlet Check Assembly. This consists of; Spring Cage, Spring, Ball, and 'O' Ring.
3. Install new Outlet Check Assembly as supplied in the kit.
4. Replace fitting. Use a quality pipe sealant, such as Loctite®. DO NOT use a tape type sealant